

## TECHNICAL SPECIFICATIONS

S. No.	Test Property	Test Method	Specification	Typical Value
1	Color	Grey/White		NA
2	Water Demand		32 to 33%	NA
3	Abrasion resistance	ISO-13007 Part 3	≤ 2000 mm <sup>3</sup>	300 - 450 mm <sup>3</sup>
4	Flexural strength	ISO-13007 Part 3	≥ 2.5 N/mm <sup>2</sup>	7.6 - 9.5 N/mm <sup>2</sup>
5	Compressive resistance	ISO-13007 Part 3	≥ 15 N/mm <sup>2</sup>	22 - 24.2 N/mm <sup>2</sup>
6	Shrinkage	ISO-13007 Part 3	≤ 3mm/m	1.8 - 2.2 mm/m
7	Water Absorption			
	After 30 minutes	ISO-13007 Part 3	≤ 5 gm	≤ 5 gm
	After 240 minutes	ISO-13007 Part 3	≤ 10 gm	≤ 10 gm

## PRECAUTIONS

- ▶ During cold weather, protect finished work from traffic until fully covered.
- ▶ Avoid contact with eyes and prolonged contact with the skin as it may cause irritation.
- ▶ In case of contact, flush thoroughly with water
- ▶ Avoid breathing dust
- ▶ Wear a mask & gloves during mixing
- ▶ Keep out of reach of children

## STORAGE

Promix GroutPro should be stored in a dry place.

## SHELF LIFE

12 months from the date of manufacturing.

## MANUFACTURED & PACKAGED BY PROMIX MANUFACTURING CO. LTD.

- 📍 Shop No. 118, Hardware City, Nakasero  
P.O Box 114654, Kampala Uganda.
- ☎ +256(0) 777 468467 | 704 659146
- ✉ operations@promixworld.com
- 🌐 promixworld.com

# GROUTPRO

## Ceramic Tile Grout



ISO 13007-3



- FOR INTERIOR AND EXTERIOR USE
- HAS A SUPERIOR ADHESION
- HAS A LOW WATER ABSORPTION
- FOR GROUT JOINTS BETWEEN 1-12MM
- CRACK RESISTANT
- POLYMER MODIFIED
- WATER RESISTANT
- EXCELLENT WORKABILITY

# GROUTPRO

## Ceramic Tile Grout

### ABOUT US

Promix is Uganda's pioneer manufacturing company that makes white / Grey-cement-based premixed mortars, for building construction and renovation products. The product range is wide with impeccable quality & competitive pricing. We are committed to continually offering you the best innovative ready-to-use building materials that will make your construction projects better, faster and economical. All our materials are tested and approved by the Uganda National Bureau of Standards (UNBS). They are expertly prepared and packaged with modern high-tech machinery.


### ABOUT PROMIX GROUTPRO

Promix GroutPro is a high performance joint filler, suitable for filling tile gaps and joints upto 6mm in width. It can be used for both internal and external applications, on walls and floors. Promix GroutPro is available in grey and white colors.



### HOW TO USE GROUTPRO

#### 1. Clean the surface

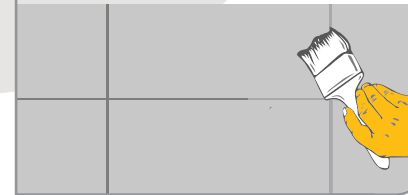

Ensure you have a clean surface free from foreign material such as dust, stones, oil etc.

#### 2. Lightly Dampen the tiles



Lightly dampen the tiles with clean water before grouting.

#### 3. Dampen the tiles




Highly porous tiles will require additional wetting of the joints to prevent excessive water loss from the grout

#### 4. Mix the Grout with water



Mix the GroutPro 5 kg with approx. 1.6 L of clean water. Stir gently using a low speed electric stirrer for good results.

#### 5. Wipe the surface

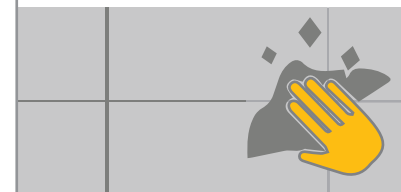

Wipe the surface to remove all excess water before starting the grouting process

#### 6. Do grouting



Leave the tiles to bond for 24 hrs and then follow the grouting process carefully.